WALT Non-redirective Crash Cushion

- Ideal for Workzones
- Lightweight Maneuverable Design
- Quick and Easy to Install
- Meets EN1317-3 80/1 Criteria
- CE Marked










WALT NON-REDIRECTIVE CRASH CUSHION

- 1. Nose
- 2. Energy Absorbing Cartridge
- 3. Wheel Assembly
- 4. Bay

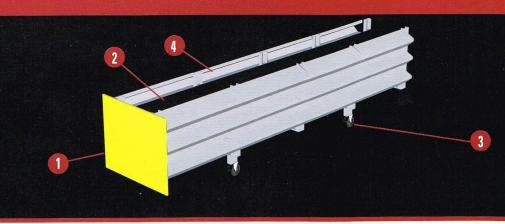

FEATURES

- 1317-3 80/1 Meets EN test criteria
- Lightweight and Compact
- Easy to deploy and remove
- Easy to maneauver
- Available for temporary or permanent applications
- Anchorless design attaches directly to barrier
- Easily attaches to most concrete barrier shapes



The Anchorless design combined with integrated wheels on the WALT System makes deployment and removal quick and simple.

THE IDEAL ATTENUATOR FOR TEMPORARY APPLICATIONS

The WALT System is a highly efficient non-redirective crash cushion tested for impacts at speeds up to 80km/h in accordance with European Standard EN 1317-3, Test Level 80/1. The WALT System is designed to attach directly to concrete barrier. This anchorless design makes the WALT System easy to delpoy and remove. The WALTsystem is ideal for temporary or permanent applications.

PHYSICAL SPECIFICATIONS

Classification Non-Redirective

Length 360 cm Width 60 cm 80 cm Height Weight 350 kg

Test Level EN1317-3 80/1



WALT System?

under 30 minutes.

Can the WALT System be moved easily?

Yes, the WALT System features integrated wheels to make manuvering easy. The shield concrete barrier in workzones. System can be moved several times per day if needed, without problems.

How long does it take to deploy the Are ground anchors needed to install the WALT System?

The WALT System can be deployed in No, The WALT System attaches directly to concrete barrier. Therefore, ground anchors are not necessary. This feature combined with integrated wheels makes the WALT system the ideal attenuator to

Distributed By:

08-753 46 01 info@rsse.se







